


MEMS connection to PIC24



No external XTAL required

Serial DB9 Socket, to PC terminal window; using UART1 module. Via PUTTY to console

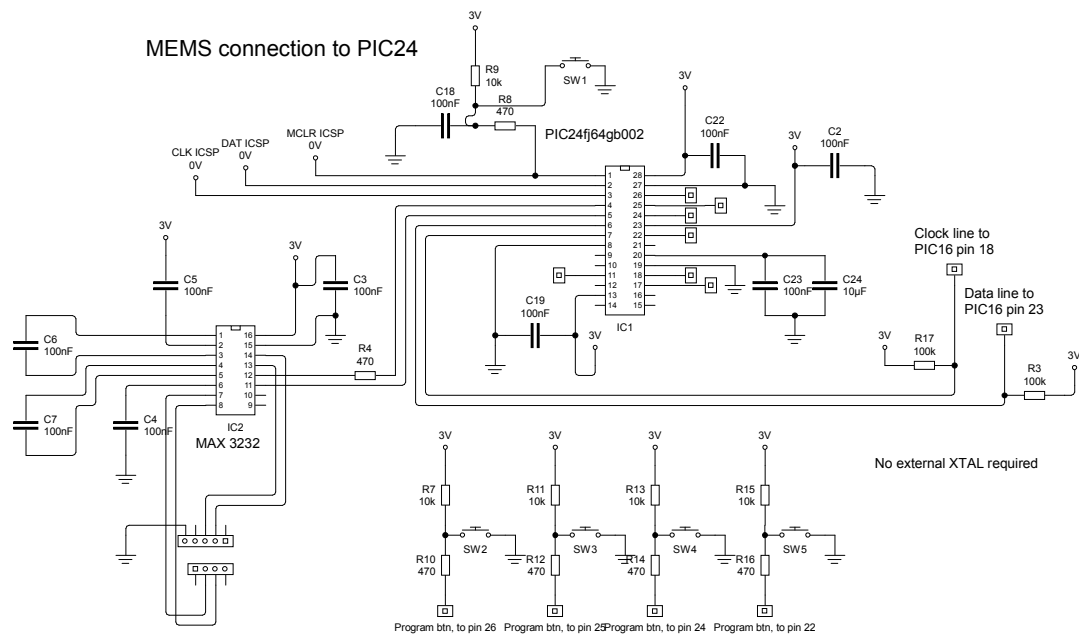